



Homogeneous Vinyl Tile AdVantage Series

Featuring Dynamic Stone / Linotesta / Strataline

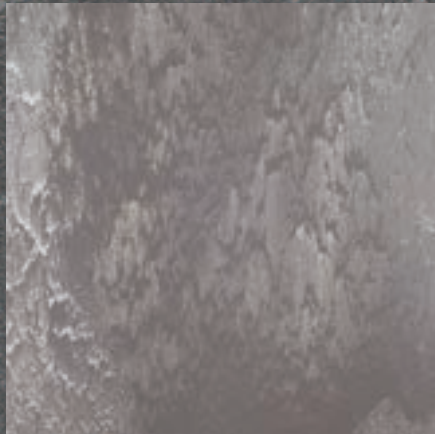

*"Capturing the grandeur of
Nature's randomness in precision
manufacturing" - TOLI*

Homogenous Tile AdVantage Series

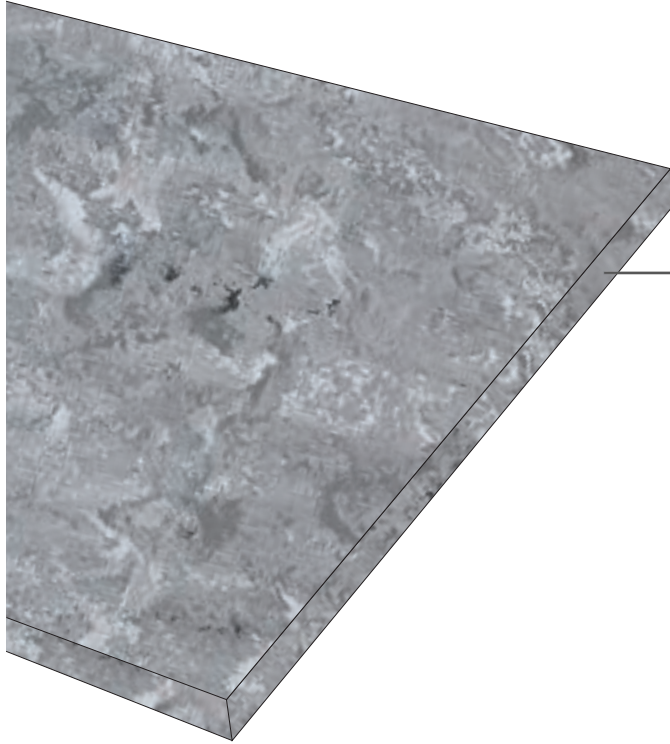


- **PERMANENT FACTORY FINISH ELIMINATES STRIPPING AND WAXING WHILE DESTROYING VIRUSES ON CONTACT (99% EFFECTIVE IN 24 HOURS)**
- Through pattern construction creates a 120 mil wearlayer (per ASTM F-410) creating a more rugged, more durable flooring that will last for generations
- Proprietary raw material blend creates a more resilient floor that is more resistant to indentation (1,000 PSI -ASTM F-970)
- 18" x 18" size eliminates 60% of seams compared to 12" x 12" tiles
- Superior dimensional stability allows for one direction or quarter turn installation.
- No stripping or waxing/polishing after installation

TOLI AdVantage Anti Viral Flooring




How It Works

1. Flooring surface is exposed to viruses (via coughing, sneezing, shoes etc.).
2. TOLI's permanent anti viral properties are integrated into the upper-most portion of the wearlayer and chemically bond with the viruses.
3. Be degenerating or degrading the structure of the virus (including the membranes and shells), the viruses are destroyed.
4. Harmless fragments are eliminated through routine maintenance.

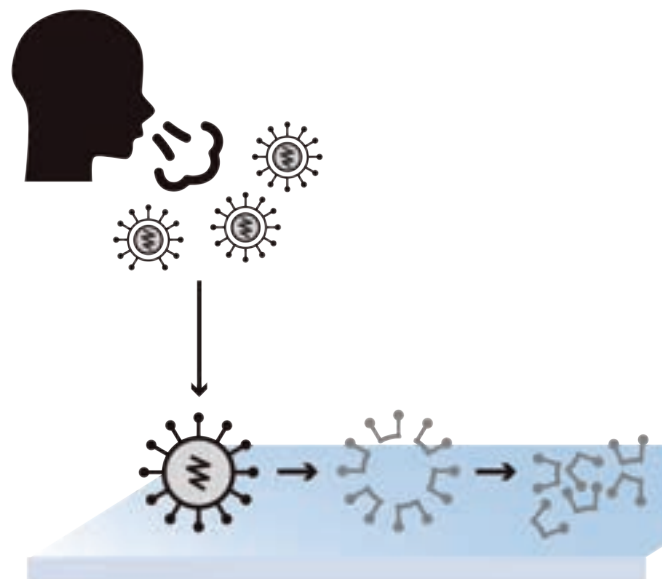

Reduces Plaque-Forming Units(PFUs) by over 99% in 24 Hours
(per IOS21702)

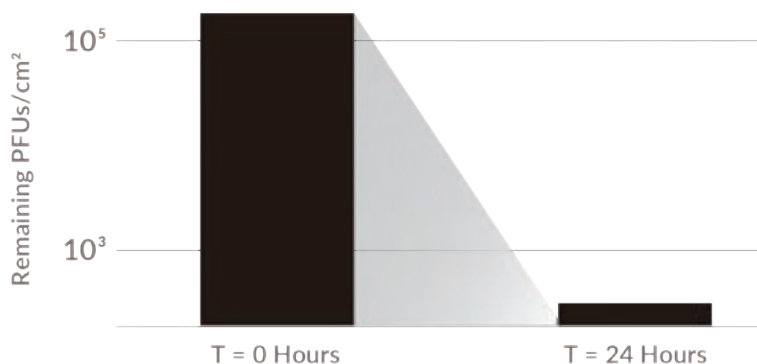

SIAA
ISO 21702
Anti Virus
Inorganic materials
infused into UV layer
JP0612352X0007H

- Reduces the number of specific viruses on the product by 99% or more.
- SIAA marking indicates products that have been quality-controlled and disclosed such information in accordance to the guidelines of the Society of International sustaining growth for Antimicrobial Articles based on the results evaluated by ISO21702
- Complies with SIAA safety standards.
- The antiviral surface treatment does not aim to cure or prevent viral diseases.

SIAA Reg. #: JP0612352X0007H


DYN-8001 Frontier Gray

Inspiration: The majestic beauty of the Alaska Range of mountains created by layers of snow and rock



DYN-8002 Glacier Blue

Inspiration: The glaciers of Greenland and their natural blue lights cast in a new dimension of color

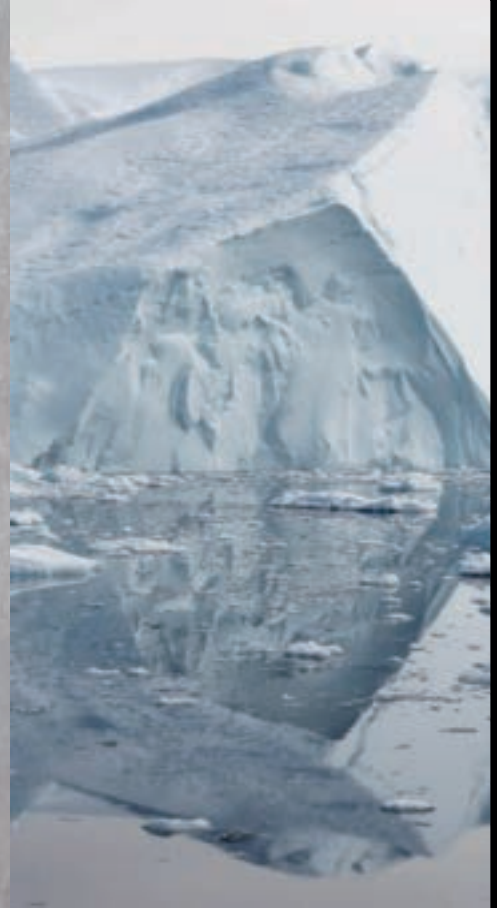

DYN 8003 - Surf Black

*Inspiration: The black sand beaches of Iceland and the mysterious scene
blending black sand and crashing waves*



DYN 8004 - Sahara White

Inspiration: Egypt's White Desert with its ancient deposits of limestone drifted and carried by nature over thousands of years



DYN 8005 - Crude Beige

Inspiration: The dry grasslands of the American southwest where nature's beauty remains untouched by humans in the wilderness of the Rockies



DYN 8006 - Ignis Brown

Inspiration: Northern Chile's harshest climate and its views of the incredible Atacama Desert enhanced by the rich minerals of nature




Linotesta AdVantage

With roots in TOLI's company name (Toyo Linoleum), linoleum was popular in the early days of the company. Linotesta is an extension of this history. With the commercial popularity of vinyl flooring. Linotesta was born in 1996. Linotesta was developed to imitate natural materials with stronger performance and easier installation. Linotesta has over 25 years of proven success in commercial spaces worldwide and continues to evolve....and now needs no waxes nor polishes and destroys viruses on contact.



LTA-517-Iron

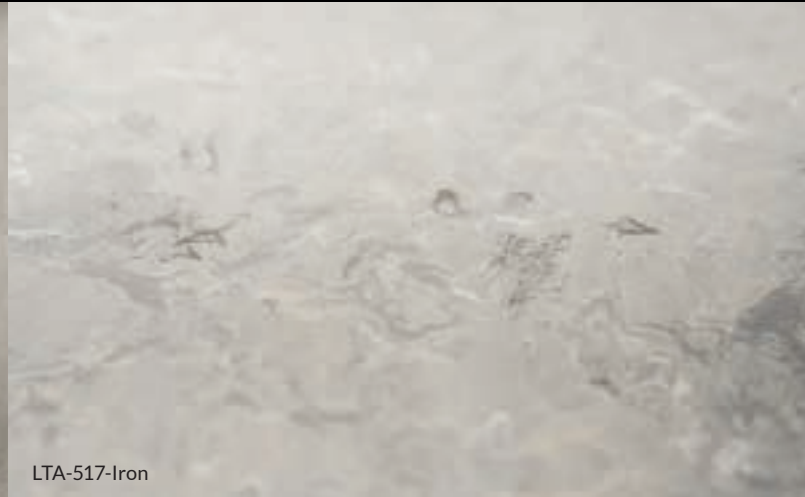

LTA-517-Iron



LTA-522-Dusty




LTA-532-Misty

LTA-516-Limestone

LTA-517-Iron

LTA-531-Sage

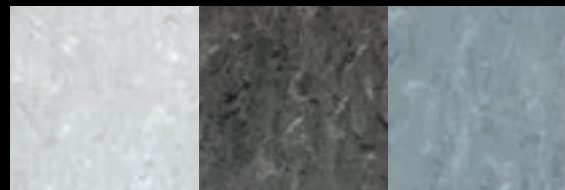

LTA-513-Steel

LTA-515-Onyx

LTA-520-Blue Waves



LTA-510-Anise

LTA-522-Dusty

LTA-508-Mushroom

Strataline AdVantage


Capturing the varied tiers of earth's strata layer, Strataline Advantage boasts a homogenous construction sealed with TOLI's anti-viral protection to destroy viruses on contact and eliminate the need for waxes or polishes. Monolithic pattern or quarter-turned, you decide and be assured the 6 nature inspired colors are always square. The subtle shading of the varied lineation contrasts within itself to create subtle and yet striking designs in heavy traffic commercial spaces.



STL-5002 Quarry




STL-5002 Quarry

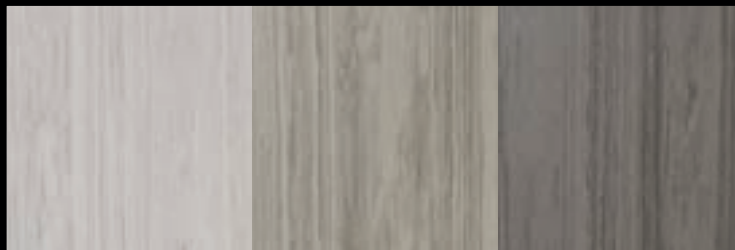

STL-5001 Clay

STL-5002 Quarry

STL-5003 Gravel

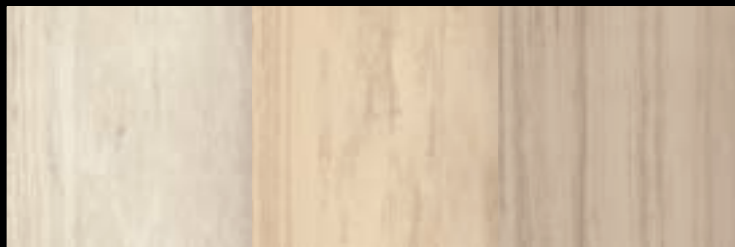

STL-5004 Pyrite

STL-5005 Sand

STL-5006 Bedrock



STL-5003 Gravel

Homogeneous Vinyl Tile AdVantage Series



Product Characteristics

Standard Spec	ASTM F1066
Classification	Class II
Nominal Dimensions	
Linotesta, Strataline	17.7" x 17.7" (450mm x 450mm)
Dynamic Stone	23.6" x 23.6" (600mm x 600mm)
Overall Thickness	3.0mm (0.120")
Wear Layer Thickness	120 mils
Packaging	
Linotesta, Strataline	30.5 SF per Carton (14 pcs)
Dynamic Stone	31.0 SF per Carton (8 pcs)
Recycled Contents	
Pre-Consumer	>50%
Post-Consumer	0-2%
MR Credit 4.1	26% (Sum of Post-Consumer + 1/2 Pre-Consumer)
Warranty	TOLI Homogeneous Vinyl Tile is covered by a limited 10-year warranty. Visit our website @ www.toli.com for complete details.

More Information



Find My Rep



Dynamic Stone Video Link



It can reduce the number of specific viruses on the product.

- the SIAA brand mark is borne on products evaluated according to ISO 21702 and they are under quality control and information disclosure by the guidelines of the Society of International sustaining growth for Antimicrobial Articles.

Caution!

- The antiviral surface treatment does not aim to cure or prevent viral diseases.
- It conforms to SIAA's safety requirements.

GET SAMPLES FAST

919-230-8700 www.toli.com

Questions? Give us a call, we're ready to help you create your next great space.

Test Performance

	Characteristic	Test Method	Requirement	Performance
ASTM F1066	Thickness	ASTM F386	± 0.005", as specified	Passes.
	Size	ASTM F2055	± 0.016" per linear foot	Passes. (TOLI's internal tolerance of ±0.008"/LF is 2X tighter than requirement)
	Squareness	ASTM F2055	0.010" max	Passes.
	Resistance to Heat	ASTM F1514	ΔE ≤ 8.0	Passes. (ΔE ≤ 1.0 as tested)
	Chemical Resistance	ASTM F925	No more than slight change in surface dulling, surface attack, or staining.	Passes.
	Deflection	ASTM F1304	1.0" minimum	Passes. (≥ 2.0" as tested)
	Dimensional Stability	ASTM F2199	0.024" per linear foot, maximum	Passes.
	Impact	ASTM F1265	No cracks beyond limit	Passes.
	Indentation-one minute	ASTM F1914	0.006"-0.015"	Passes. (0.006"-0.008" as tested)
	Indentation-ten minutes	ASTM F1914	0.0100"-0.0209" (based on one minute result)	Passes. (0.010"-0.013" as tested)
Additional Tests	Indentation-at 115oF	ASTM F1914	< 0.032"	Passes. (0.022"-0.026" as tested)
	Static Load Limit	ASTM F970 (Modified)	≤ 0.005"	> 1,000 PSI. (0.002" as tested)
	Static Coefficient of Friction	ASTM D2047	≥ 0.5	ADA Compliant
	Wear Layer Thickness	ASTM F410	No requirement	0.120" (120 mils)
	Critical Radiant Flux	ASTM E648	0.45 W/cm ² or more-Class I	Class I (> 0.45 W/cm ²)
	Smoke Generation	ASTM E662	450 or less	<450 (Flaming and Non-flaming)
	Resistance to Light	ASTM F1515	ΔE ≤ 8.0	Passes. (ΔE ≤ 2.0 as tested)
	VOC Emissions	CA 01350	TVOC ≤ 0.5 mg/m ³	Passes. FloorScore Certified FS-03026

Recycled contents and performance results were accurate at the time this folder was created. Visit our website @ www.cbcbflooring.com for our most recent figures as well as installation instructions, maintenance procedures, and detailed specifications.